


39 Series


Data Sheet

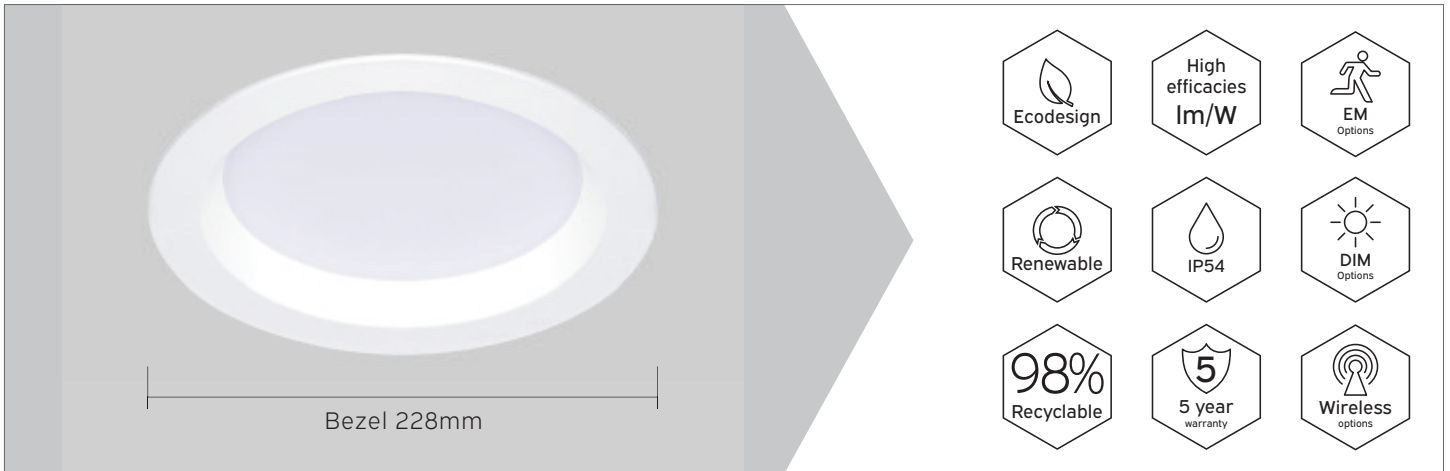

KEY FEATURES

- Professional IP54 commercial downlight
- Recessed opal PC diffuser
- SMD LED powered by Tridonic
- Bezel finished in RAL 9016 white
- Switchable 3 x CCT - 830 / 840 / 856
- Long life 50,000 h L70
- Emergency, DALI, dimming and wireless network control options
- 5 year warranty

DIMENSIONS

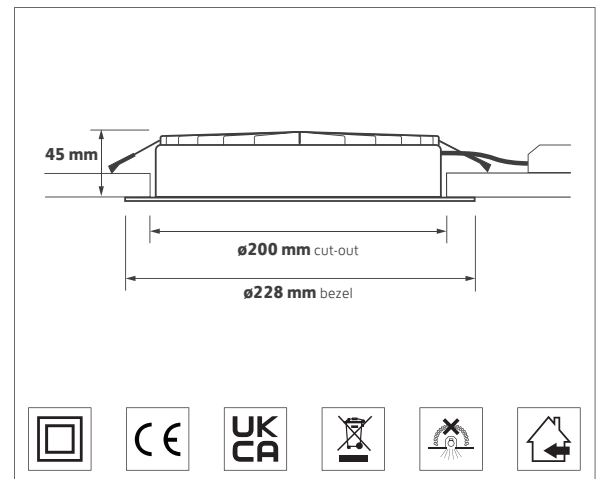

ORDERING INFORMATION

Luminaire output (lm)	Colour temp (switchable)	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1625	830	13.5	172	120	
1625	840	13.0	172	125	39.001
1475	856	13.5	154	109	
2250	830	19.0	160	118	
2275	840	18.5	163	123	39.002
2025	856	19.5	144	107	
2625	830	23.0	152	114	
2700	840	22.0	157	123	39.003
2350	856	23.0	137	102	
3325	830	31.5	142	106	
3500	840	30.0	149	117	39.004
3025	856	31.5	130	96	

OPTIONS

Options	Suffix
Control gear	/MDIM, /ECO, /BTC
Emergency - Remote indicator	/EM, /EMD


39 Series

Options & accessories




Made in the UK

LUMENLOOP



/MDIM

Phase-cut mains dimming



/ECO

SwitchDIM / DALI / DSI



/BTC

Casambi wireless network inc. dimming



/EM

Emergency Remote indicator



/EMD

DALI / Self test EM Remote indicator

PV - PRODUCT VARIATIONS



PV - Contact Sales

Choice of connectors

RELATED PRODUCTS



See 36 Series

110 mm downlight



See 37 Series

190 mm downlight