

# INSTALLATION GUIDE:

LED DOWNLIGHT  
990.0190.01



## IMPORTANT:


The luminaire must not be covered by any debris or insulating material. Ensure there is a minimum of 50 mm airspace around the luminaire. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671.

**NOTE: THE LED MODULES IN THIS LUMINAIRE ARE NON-USER REPLACEABLE.**  
**PLEASE RETAIN THIS GUIDE FOR FUTURE REFERENCE AND RECYCLE PACKAGING.**

### A




**ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION**



- Cut a 140 x 140 mm square hole at the desired location.

### B

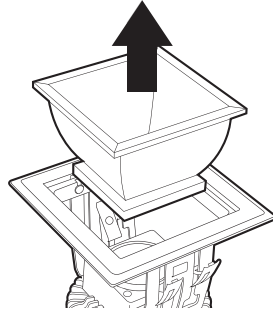

- Remove reflector from luminaire taking care not to damage the reflector surface.


### C



- BLUE
- YELLOW / GREEN (if present)
- BROWN - SWITCHED
- BLACK - UNSWITCHED (Permanent) Emergency only


- Connect the luminaire to the mains supply using a terminal block (not supplied) compliant with the requirements of EN60998-2-1 or 2-2.
- For Touch & Dim / DALI wiring see instruction leaflet **990.0009.01**.

### D

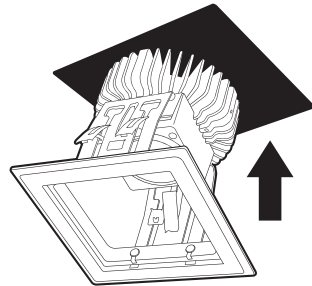


- Offer luminaire into desired location.

### E

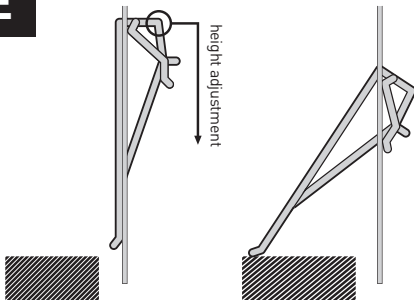

- Lock the luminaire in place by means of the four adjustable fixing springs as illustrated above.

### F

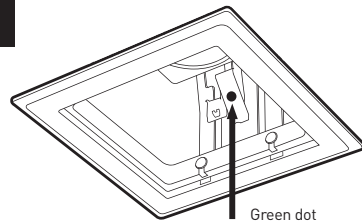

- Align green dot on the reflector with the green dot on the luminaire and carefully relocate reflector.
- Where the luminaire is supplied with an accessory, install according to separate instructions provided.



**REINSTATE MAINS SUPPLY**