

LXS002

Datasheet

LUMENLOOP



EU





ISO

Features

- ▶ Maintained or non-maintained operation
- ▶ 15 x High intensity LEDs for bright, even illumination of legend
- ▶ Double sided acrylic legend panels conform to requirements of EU signs directive
- ▶ ISO signage also available
- ▶ Custom designed signage available
- ▶ Supplied with arrow down legend (EU)
- ▶ DALI / self-test version available
- ▶ Ceiling mounting bracket
- ▶ Compact lamp / gear housing compared with conventional light sources

Technical Drawing

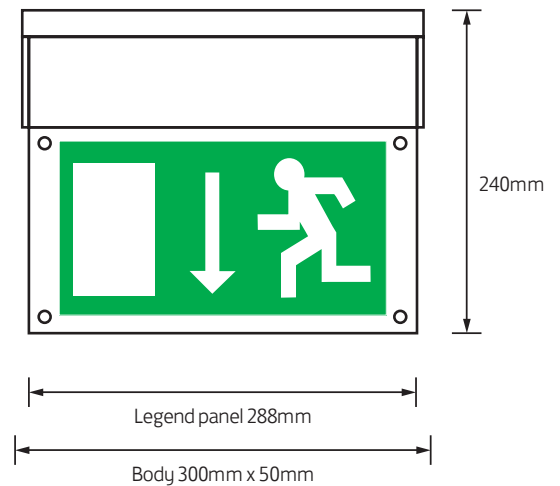

Ordering Information

Model Ref.	Bezel Finish	Rated Duration	Recharge Time	Typical Lifetime
LXS002	Brushed Aluminium	3hr	24hr	50,000hr

Options

Please select from the options below.

DALI / self-test	/EMD
Reversible left / right legend panel (EU)	LXSLR
Double sided arrow up legend panel (EU)	LXSUP
Double side arrow down legend panel (ISO)	LXSAD/ISO
Reversible left / right legend panel (ISO)	LXSLR/ISO
Double sided arrow up legend panel (ISO)	LXSUP/ISO