

LXS005

Datasheet

LUMENLOOP



EU




ISO

Features

- ▶ 3 hour maintained operation
- ▶ 12 x High intensity LEDs for bright, even illumination of legend
- ▶ Screen printed opal polycarbonate legend panel conforms to requirements of EU signs directive
- ▶ ISO legend panels also available
- ▶ Wall mounting bracket
- ▶ DALI / self-test version available

Technical Drawing

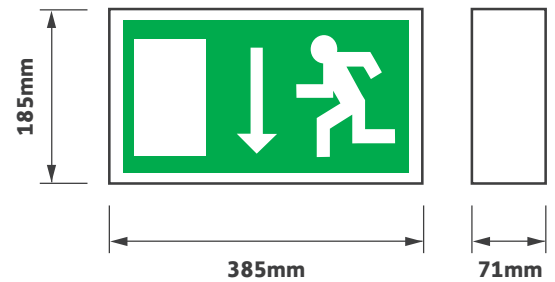

Ordering Information

Model Ref.	Bezel Finish	Rated Duration	Recharge Time	Typical Lifetime
LXS005	White	3hr	24hr	50,000hr

Options

Please select from the options below.

DALI / self-test	/EMD
Arrow right legend panel (EU)	LXSR
Arrow left legend panel (EU)	LXSL
Arrow up legend panel (EU)	LXSWBUP
Arrow right legend panel (ISO)	LXSR/ISO
Arrow left legend panel (ISO)	LXSL/ISO
Arrow up legend panel (ISO)	LXSWBUP/ISO
Arrow down legend panel (ISO)	LXSWBAD/ISO