

15 Series

Data Sheet




LUMENLOOP



KEY FEATURES

- Professional surface-mounted LED downlight
- Integral Philips LED and driver system
- Finished in brilliant white RAL9016 as standard
- Low glare multi-faceted reflector as standard
- ETL compliant efficacies of up to 133 lm/tcW
- Life over 60,000h L80/B10
- MacAdam colour tolerance 3 SDCM
- Integral DALI and emergency options
- 5 year warranty
- Proudly made in the UK

DIMENSIONS

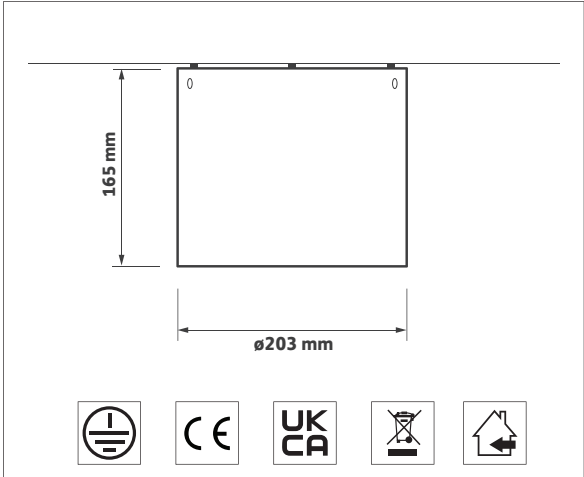

ORDERING INFORMATION

Luminaire output (lm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1200	830	9.5	193	126	15.001
1250	840	9.5	203	132	15.002
1900	830	15.0	190	127	15.003
2000	840	15.0	199	133	15.004
2950	830	24.0	183	123	15.005
3125	840	24.0	192	130	15.006

OPTIONS

Options	Suffix
Finish options	/BK, /GY, /WH
Satin etched reflector	/SA65
Control gear	/T+DALI, /BTC
Emergency - Integral ILEM	/EMI, /EMDI
High color rendering Premium White LED	/R9
Suspension kits	/SUS, /SUS.B
Product variations available	PV.

15 Series

Options



LUMENLOOP



/BK
Black - RAL 9005




/GY
Grey - RAL 9006



/WH
Soft white - RAL 9010



/SA65
65° satin etched
reflector




/T+DALI
Touch dimming or DALI
control gear



/BTC
Casambi wireless
network inc. dimming



/EMI
Emergency
Integral ILEM



/EMDI
DALI / Self test EM
Integral ILEM



/R9
High colour rendering
Premium White LED



/SUS
2 m suspension kit with
mounting plate



/SUS.B
2 m suspension kit



BTWS001
Wireless Casambi
single wall switch



BTWS002
Wireless Casambi
twin wall switch

PV - PRODUCT VARIATIONS



PV - Contact Sales
Any RAL colour

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.