




KEY FEATURES

- 600 x 600 edge-lit LED panel powered by Philips
- UGR <19 low glare for LG7 compliance
- Colour rendering >Ra80 for office applications
- 3 step MacAdam colour tolerance (3SDCM)
- Life >50,000 hours L80/B10
- DALI, dimming, wireless control and emergency options
- Bespoke image panels available for individual or groups of luminaires
- Surface mounted, plasterboard and suspended options
- 5 year warranty

DIMENSIONS

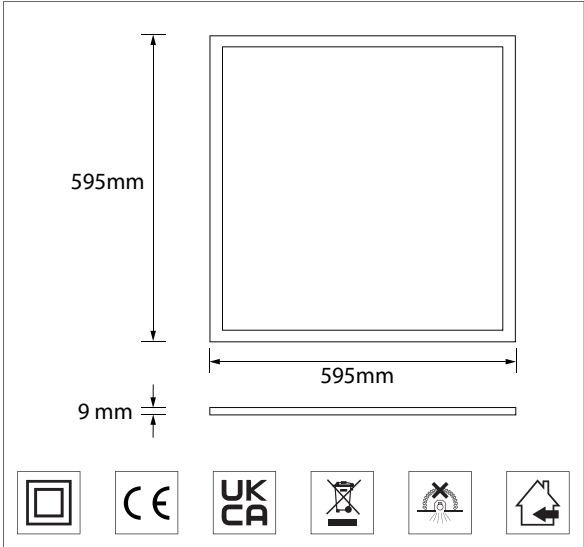

ORDERING INFORMATION

Luminaire output (lm)	Colour	Luminaire power (tcW)	Luminaire efficacy (lm/tcW)	Model ref.
3400	830	29	119	20.001
3550	840	29	125	20.002
4075	830	35	116	20.003
4250	840	35	121	20.004
4500	830	39	115	20.005
4700	840	39	121	20.006

OPTIONS

Options	Suffix
Control gear	/T+DALI, /MC, /BTC
Emergency	/EM, /EMS, /EMP
Surface mounting kit	SURF.178
Plasterboard mounting kit	PBF.178
Suspension kit	SUS.178/1.2M
SAS-150 concealed T-frame mount	SAS001
Product Variations available	PV.

# 20 Series


## Options & accessories



LUMENLOOP



**/T+DALI**  
Touch dimming or  
DALI driver

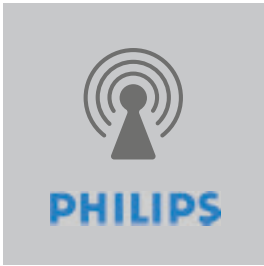

**/MC**  
Philips MasterConnect  
wireless control driver



**/BTC**  
Casambi wireless  
control driver




**BTWS001**  
Wireless Casambi  
single wall switch



**BTWS002**  
Wireless Casambi  
twin wall switch



**/EM**  
3hr emergency



**/EMS**  
3hr self-test emergency



**/EMP**  
3hr DALI emergency



**SURF.178**  
Surface  
mounting kit




**PBF.178**  
Plasterboard  
mounting kit



**SUS.178/1.2M**  
Suspension kit



**SAS.001**  
SAS-150 concealed  
T-frame mount RAL9010



**PV - Contact Sales**  
Plug & Play  
Choice of connectors



**PV - Contact Sales**  
Illuminated image panels  
Contact Sales



**PV - Contact Sales**  
Illuminated image panels  
Contact Sales

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.