



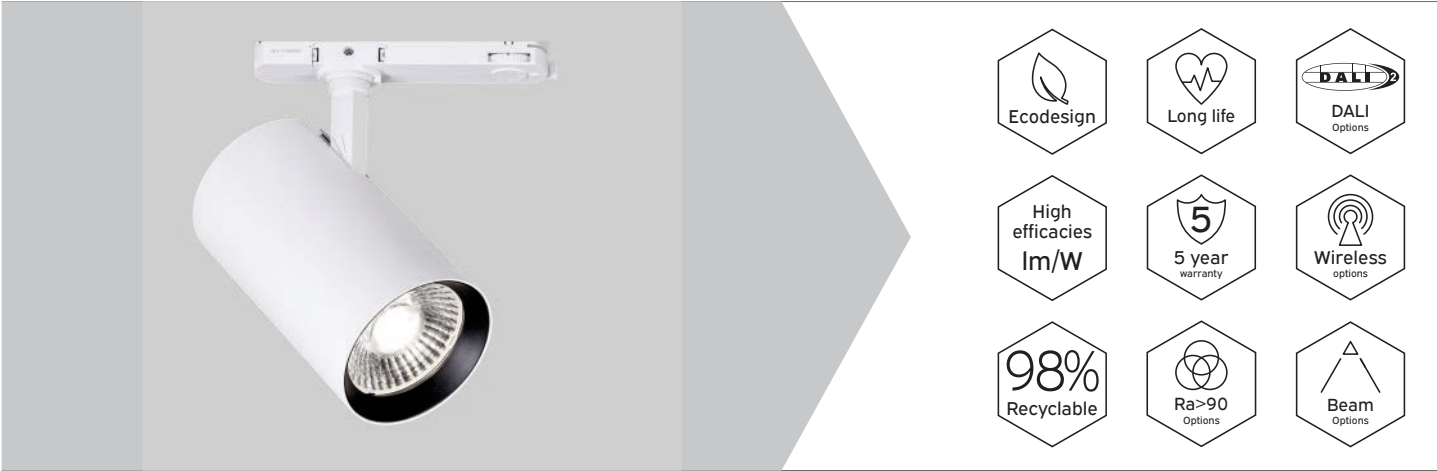

KEY FEATURES

- Professional minimalist LED track mounted spotlight
- Finished in white as standard with black option
- Features Vossloh LED and in-track driver system
- Features a 36° medium beam lens as standard
- 15°, 24°, 60° lens options
- Ra80 with Ra90 options
- MacAdam colour tolerance 3 SDCM
- Lumen maintenance L90 @ 55,000 hours
- DALI and wireless control options
- Range of interchangeable accessories available
- 5 year warranty

DIMENSIONS

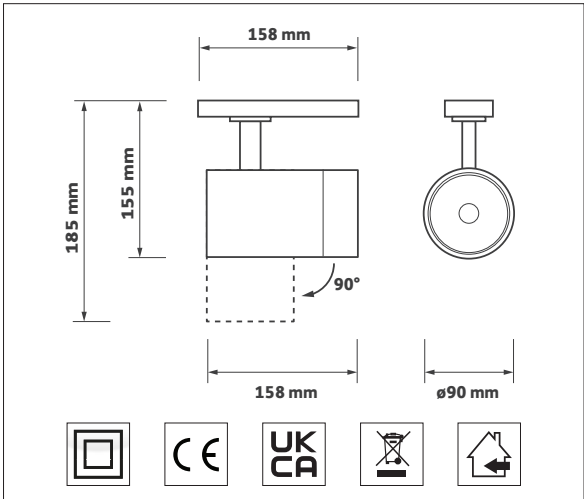

ORDERING INFORMATION

Luminaire output (lm)	Colour	Luminaire power (tcW)	Luminaire efficacy (lm/tcW)	Model ref.
1875	830	11.5	163	26.001
1925	840	11.5	167	26.002
2925	830	19.0	154	26.003
3025	840	19.0	159	26.004
4225	830	31.5	134	26.005
4350	840	31.5	138	26.006
5075	830	39.5	128	26.007
5225	840	39.5	132	26.008

OPTIONS

Options	Suffix
Black body	/BK
Beam options	/SNB, /NB, /WB
Ra90	/R9
Control gear	/DALI, /BTC
Long snoot	/LSW, /LSB
Asymmetric snoot	/ASW, /ASB
Honeycomb louvre	/HC

26 Series

Options



LUMENLOOP



/BK

Black



/HC

Honeycomb louvre



/DALI

DALI control gear



/BTC

Casambi wireless network (inc. dim)



/9

Ra90 high colour rendering LED module



/SNB

15° super narrow beam




/NB

24° narrow beam




/WB

60° wide beam



/LSW

Long snoot
White



/LSB

Long snoot
Black



/ASW

Asymmetric adjustable
snoot - White



/ASB

Asymmetric adjustable
snoot - Black

26 Series

Options




LUMENLOOP

RELATED PRODUCTS



See 25 Series
ø64 mm



See 28 Series
Zoom snoot



See 28 Series
Framing projector



Track and accessories
See Stucchi OneTrack®
datasheet



BTWS001
Wireless Casambi
single wall switch



BTWS002
Wireless Casambi
twin wall switch

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.