


17 Series

Data Sheet




LUMENLOOP

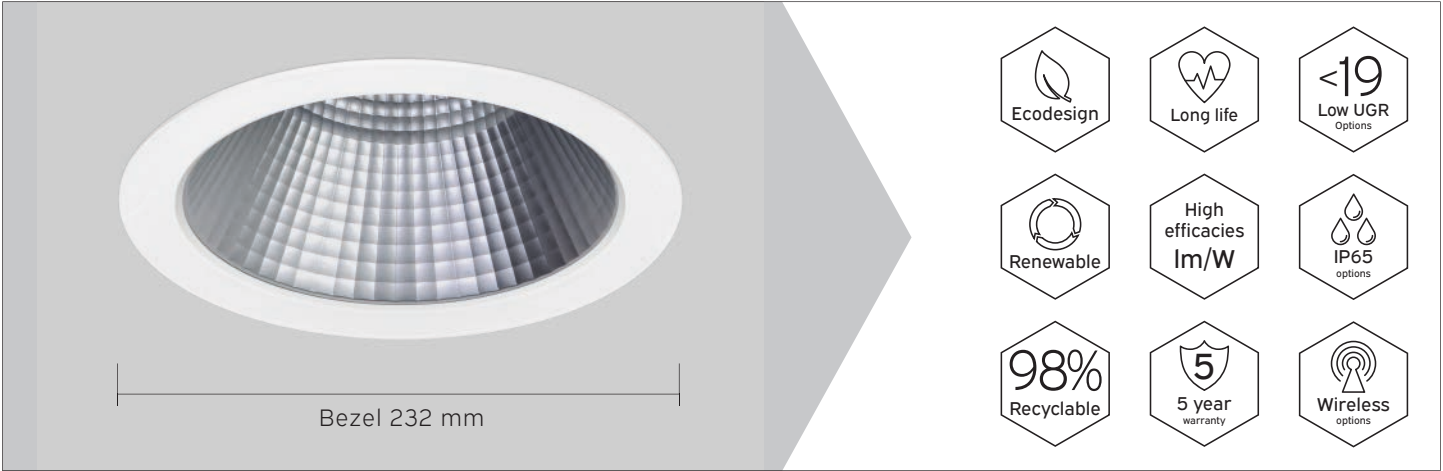

KEY FEATURES

- Professional, high performance LED downlight
- Features Tridonic SLE LED module and driver system
- Slimline die-cast bezel in brilliant white RAL 9016
- Low glare multi-faceted aluminium reflector
- High efficacies of over 130 lm/tcW
- Nominal rated life 60,000h L90/B10
- MacAdam colour tolerance <3 SDCM
- DALI, Bluetooth and emergency options
- IP54 and IP65 options
- 5 year warranty
- Proudly made in UK

DIMENSIONS

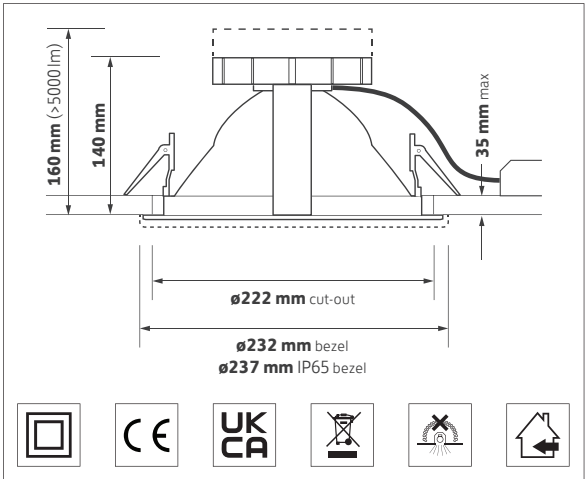

ORDERING INFORMATION

Luminaire output (lm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1150	830	9.5	197	121	17.001
1200	840	9.5	207	126	17.002
1825	830	14.5	196	126	17.003
1900	840	14.5	204	131	17.004
3100	830	24.5	185	127	17.005
3250	840	24.5	194	133	17.006
4500	830	37.0	172	122	17.007
4700	840	37.0	180	127	17.008
5100	830	44.5	170	115	17.009
5300	840	44.5	177	119	17.010

OPTIONS


Options	Suffix
Control gear	/ECO, /TOP, /BTC
High colour rendering	/R9
Emergency - Remote indicator	/EM, /EMP
Emergency - Integral indicator	/EMI, /EMPI
IP54 sealed clear lens	/54
IP65 universal carrier bezel	/65
Product variations available	PV.

17 Series

Accessories




LUMENLOOP



/ECO

SwitchDIM, DALI & DSI



/TOP

Tridonic Excite
Series driver




/BTC

Casambi wireless
network inc. dimming




/R9

High colour rendering
LED module




/EM

Emergency
Remote indicator



/EMP

EM Pro DALI emergency
Remote indicator




/EMI

Emergency
Integral indicator



/EMPI

EM Pro DALI emergency
Integral indicator



/54

IP54 sealed
clear lens



/65

IP65 option



Bezel + lens



IP65/002/240

IP65 RAL 9010 bezel
Clear glass



IP65/008/240

IP65 RAL 9010 bezel
Opal polycarbonate



IP65/009/240

IP65 RAL 9010 bezel
Clear polycarbonate

17 Series

Accessories



LUMENLOOP



GF008 / GF010
Anti-tamper driver
Anti-tamper bit



BTWS001
Wireless Casambi
single wall switch



BTWS002
Wireless Casambi
twin wall switch

PV - PRODUCT VARIATIONS




PV - Contact Sales
Any RAL colour bezel




PV - Contact Sales
Choice of connectors



PV - Contact Sales
LSOH / LSF cable



PV - Contact Sales
Choice of modules and
drivers



PV - Contact Sales
High ambient
temperatures



PV - Contact Sales
RGBW colour change

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.