

184 Series

Data Sheet



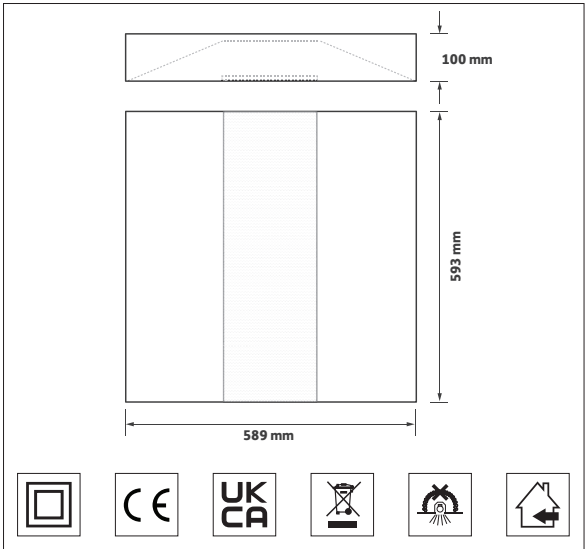
LUMENLOOP



KEY FEATURES

- Professional direct / indirect 600 x 600 LED modular
- Back-lit micro-prismatic central diffuser
- Gently illuminated indirect lateral wings
- Colour rendering >Ra80 for office applications
- UGR <19 low glare versions for LG7 compliance
- High output version of up to 5125 llm
- Long life up to >100,000 hours L70/B10
- Wireless, DALI and emergency versions
- Tunable white variation available for HCL
- 5 year warranty

DIMENSIONS



ORDERING INFORMATION

Luminaire output (llm)	Colour temp	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (llm/tcW)	Model ref.
2975	830	32.0	136	92.7	184.001
3200	840	32.0	146	99.1	184.002
3400	830	31.5	159	108.3	184.003
3575	840	31.5	168	114.0	184.004
4875	830	46.0	155	105.1	184.005
5125	840	46.0	163	110.1	184.006

OPTIONS


Options	Suffix
Control gear	/T+DALI, /BTC
Emergency	/EMI, /EMDI, /EMSI
Surface mounting kit	SURF.184
Suspension kit	SUS.184/1.2M
Plasterboard mounting kit	PBF.184
Product Variations available	PV.

184 Series



Options & accessories



LUMENLOOP

 /T+DALI Touch dimming or DALI control gear	 /BTC Casambi wireless control driver	 /EMI 3hr integral emergency	 /EMDI 3hr integral DALI emergency	 /EMSI 3hr integral self-test emergency
 SURF.184 Surface mounting kit	 PBF.184 Plasterboard mounting kit	 SUS.184.1.2M 1.2 m wire suspension kit	 BTWS001 Wireless Casambi single wall switch	 BTWS002 Wireless Casambi twin wall switch

PV - PRODUCT VARIATIONS

 PV - Contact Sales Plug & Play Choice of connectors	 PV - Contact Sales Tunable white for HCL	 PV - Contact Sales Sensor control options
--	--	---

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.