

Crown

COMPACT SURFACE-MOUNTED LED DOWNLIGHT

Compact surface-mounted LED downlight with an integral LED and driver system and low-glare multi-faceted reflector.


LUMENLOOP

COMPACT SURFACE-MOUNTED LED DOWNLIGHT

Crown

Six output and colour-temperature configurations are listed.

DIMENSIONS

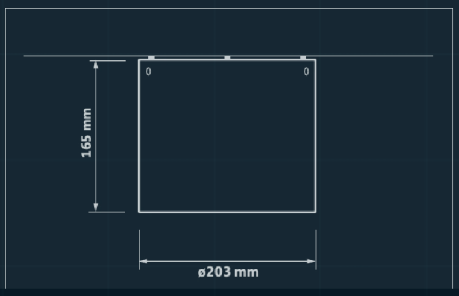

TECHNICAL DRAWING — NOT TO SCALE

MOUNTING	DIAMETER × HEIGHT
Surface mounted	203 × 165 mm
LIFE	**FINISH**
>66,000 h L80/B10	RAL9016 standard

1,300-3,250 lm
LUMINAIRE OUTPUT

9.5-24.5 W
SYSTEM POWER

3000K / 4000K
COLOUR TEMPERATURE

203 mm
BODY DIAMETER

SPECIFICATION PROFILE

Optical
Low-glare multi-faceted reflector.

Construction
Lightweight spun aluminium body.

Installation
Surface-mounted downlight.

LUMINAIRE OUTPUT (LM)

MODEL	W	CCT	STD.	/SA65	/R9	BOTH
.001	9.5	3000K	1300	1200	1250	1150
.002	9.5	4000K	1350	1250	1300	1200
.003	15.0	3000K	2025	1875	1950	1800
.004	15.0	4000K	2100	1925	2025	1875
.005	24.5	3000K	3150	2900	3025	2800
.006	24.5	4000K	3250	3000	3125	2900

CROWN model suffixes shown. /R9: Ra90; /SA65: satin etched reflector. Both options may be combined. Emergency output: 80 lm.

CONTROLS AND EMERGENCY



/T+DALI Touch dimming / DALI

/BTC Casambi wireless

/EMI	Integral non-maintained ILEM
/EMDI	DALI / self-test integral ILEM

OPTICAL, FINISH AND SUSPENSION

/R9	Ra90 high colour-rendering LED
/SA65	65° satin etched reflector
/BK /GY /WH	Black RAL9005 / grey RAL9006 / soft white RAL9010
/SUS /SUS.B	2 m suspension kit with / without mounting plate
BTWS001 /002	Single / twin Casambi wall switch