ADJUSTABLE LED DOWNLIGHT / PHILIPS INSIDE / EMERGENCY OPTIONS

Twist

Mini high-output, low-glare adjustable LED gimbal with Philips LED and driver system.

TECHNICAL DATA
LL-TWIST-DS
REV 2 / OCT 2026




1,150–2,800 lm
LISTED OUTPUT RANGE

355°
ROTATION

30°
TILT ADJUSTMENT

>66,000 h
L90/B10 MAINTENANCE

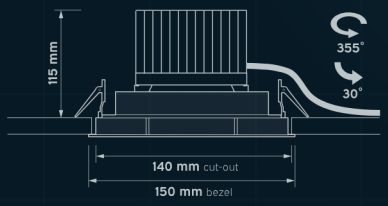

BEZEL
150 mm

CUT-OUT
140 mm

HEIGHT
115 mm max

CEILING THICKNESS
35 mm max.

01 Output selection

SIX SOURCE-LISTED MODEL REFERENCES ACROSS 3000 K AND 4000 K.

MODEL REF.	OUTPUT	COLOUR	POWER	OPTIC
TWIST.001	1,150 lm	3000 K	8 tcW	24° standard
TWIST.002	1,175 lm	4000 K	8 tcW	24° standard
TWIST.003	1,950 lm	3000 K	13.5 tcW	24° standard
TWIST.004	2,025 lm	4000 K	13.5 tcW	24° standard
TWIST.005	2,725 lm	3000 K	19 tcW	24° standard
TWIST.006	2,800 lm	4000 K	19 tcW	24° standard

Output and power values are source data; 24° reflector is standard.

02 Specify Twist

REFLECTOR, FINISH, DIMMING, CASAMBI AND EMERGENCY OPTIONS ARE SOURCE-LISTED.

REFLECTOR & FINISH

/NB / /WB	12° or 40° reflector
/BK	Black body - RAL 9005

CONTROL

/T+DALI	Touch dimming / DALI
/BTC	Casambi wireless network

EMERGENCY

/EM	3 h conversion with remote indicator
/EMD	DALI emergency with remote indicator
/EMS	Self-test, remote indicator

SPECIFICATION OPTIONS
Reflector, finish, dimming, Casambi and emergency options.

DOCUMENT
Technical data
REV 2 / OCT 2026

MODULE
Ra80 LED module; /R9 Ra90 option.

DRIVER
Philips LED and driver system.

FLICKER
No visible flicker (IEEE 1789-2015).

WARRANTY
5-year warranty.

Figures and options are provided for product selection. Details may change without notice. E&OE.

02045 721 554
INFO@LUMENLOOP.CO.UK
LUMENLOOP.CO.UK