
ADJUSTABLE LED TRACK SPOTLIGHT / COMMERCIAL DISPLAY LIGHTING


# Focal Track

Adjustable LED track spotlight with interchangeable lenses, supplied with a medium beam as standard.

TECHNICAL DATA
LL-FOCALTRACK-DS
REV 1

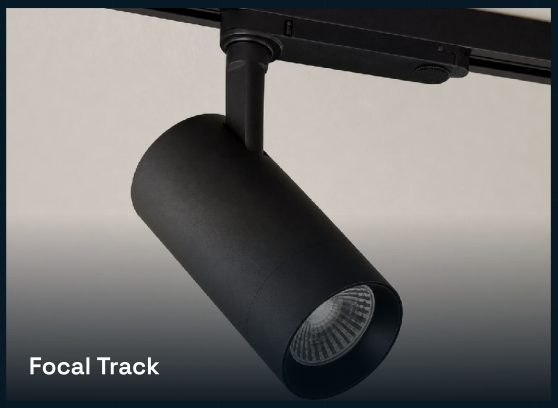


| 1,500-2,800 lm | 11.0-26.5 W | 3000K / 4000K | >55,000 h |
|---|---|---|---|
| ENGINE OUTPUT | SYSTEM POWER | COLOUR TEMPERATURE | RATED LIFE L90 |

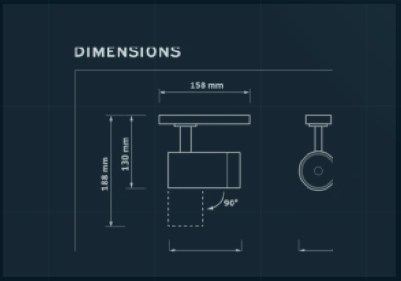


| LENGTH | OVERALL HEIGHT |
|---|---|
| 158 mm | 188 mm |
| **DIAMETER** | **MOUNTING** |
| 64 mm | Track mounted |

## 01 Output selection

OUTPUT, POWER AND COLOUR-TEMPERATURE COMBINATIONS ARE SELECTED BY MODEL CODE.

| MODELS | OUTPUT | POWER | LED COLOUR | MOUNTING |
|---|---|---|---|---|
| FOCALTRACK.001/LO | 1,500 lm | 11.0 W | 3000K | Track |
| FOCALTRACK.002/LO | 1,550 lm | 11.0 W | 4000K | Track |
| FOCALTRACK.001 | 1,825 lm | 14.0 W | 3000K | Track |
| FOCALTRACK.002 | 1,875 lm | 14.0 W | 4000K | Track |
| FOCALTRACK.003 | 2,350 lm | 20.5 W | 3000K | Track |
| FOCALTRACK.004 | 2,425 lm | 20.5 W | 4000K | Track |
| FOCALTRACK.005 | 2,725 lm | 26.5 W | 3000K | Track |
| FOCALTRACK.006 | 2,800 lm | 26.5 W | 4000K | Track |

Select option and accessory suffixes with the base code.


## 02 Configure Focal Track

INTERCHANGEABLE OPTICS, CONTROL AND ACCESSORY CHOICES ARE AVAILABLE FOR SELECTION.

### AVAILABLE OPTION DETAILS



**/WB**
Wide beam lens



**/SNB**
Super-narrow lens



**/NB**
Narrow beam lens




**/DALI**
DALI control




**/BTC**
Casambi control

### FINISH / OPTICS

| | |
|---|---|
| WHITE / /BK | White standard; black body option |
| MEDIUM BEAM | 40° supplied as standard |
| /SNB / /NB / /WB | 18°, 24° and 50° lens options |
| /HC | Honeycomb louvre accessory |

### CONTROL / ACCESSORIES

| | |
|---|---|
| /MDIM / /DALI / /BTC | Mains dimming, DALI and Casambi |
| RA90 | High colour rendering — suffix confirmation |
| /LSW / /LSB | Long snoot, white or black |
| /ASW / /ASB | Asymmetric adjustable snoot, white or black |
| /BD | Black barn doors |

**PRODUCT VARIATIONS**

Tunable white for HCL · Philips MasterConnect wireless control · HubSense wireless control · Any RAL colour.

**DOCUMENT**

Technical data
REV 1

**OPTICAL**
Interchangeable lenses; medium beam supplied standard.

**DRIVER**
Vossloh LED and in-track driver system.

**CONTROLS**
Mains dimming, DALI and Casambi options.

**ACCESSORIES**
Honeycomb louvre, snoots and barn doors listed.



Figures and options are provided for product selection. Details may change without notice. E&OE.

02045 721 554
INFO@LUMENLOOP.CO.UK
LUMENLOOP.CO.UK