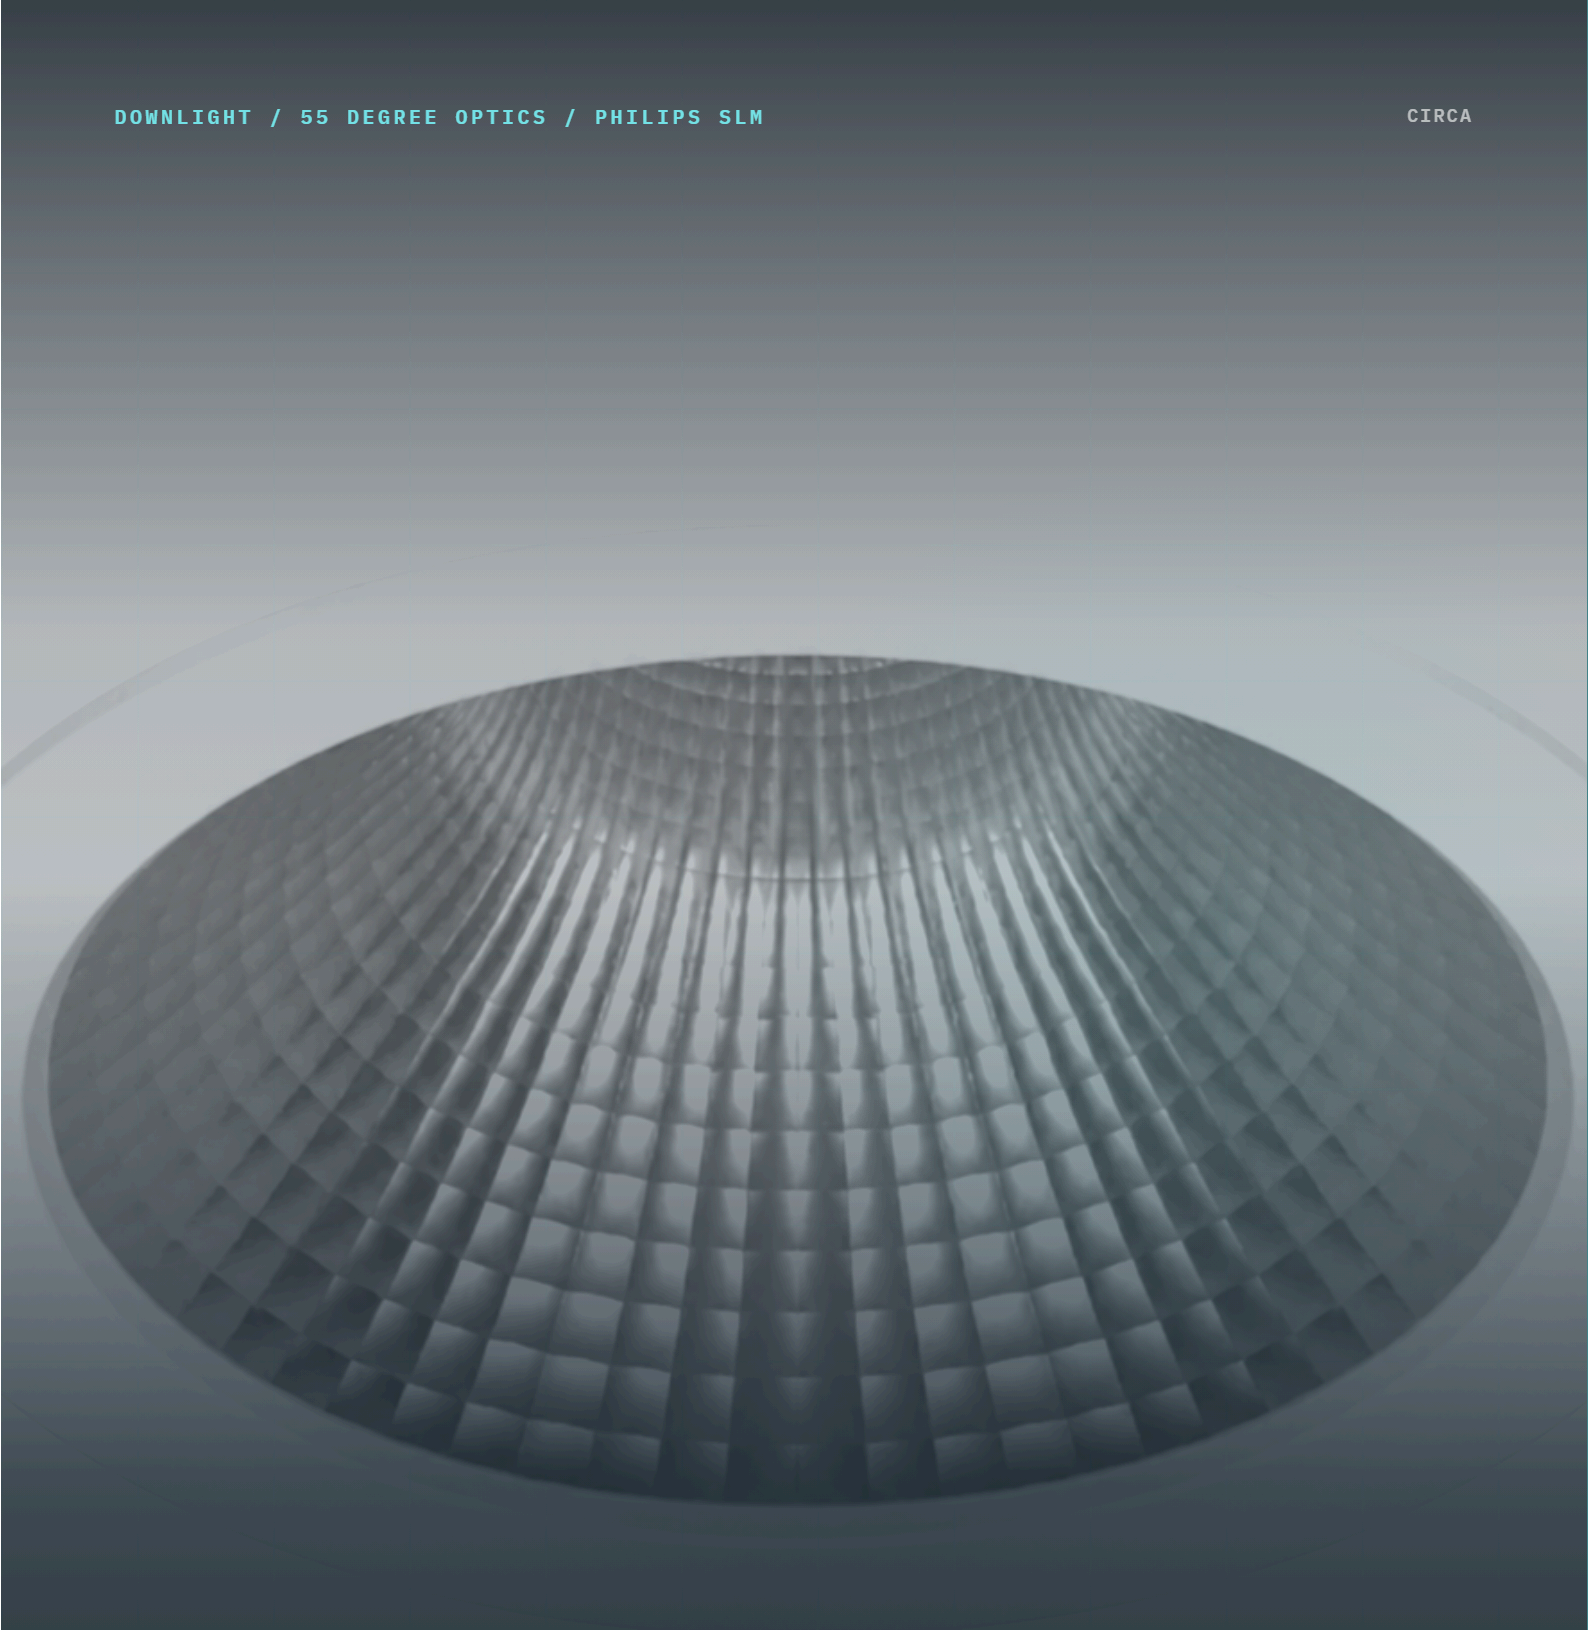


Circa

PHILIPS SLM


Low-glare architectural LED downlight with configurable output, controls and emergency options.

LUMENLOOP

DOWNLIGHT / 55 DEGREE OPTICS /
PHILIPS SLM

Circa

Eight models across 3000 K and 4000 K.

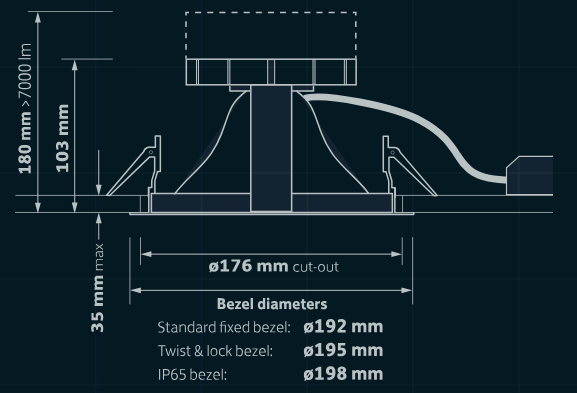

TECHNICAL DRAWING NOT TO SCALE

1,325–4,650 lm
LISTED OUTPUT RANGE

>66,000 h
L90 MAINTENANCE

14.8–19.2
STANDARD UGR RANGE

SDCM <3
COLOUR CONSISTENCY

SPECIFICATION PROFILE

Platform
Philips SLM LED module and driver.

Optics
55 degree aluminium reflector.

Performance
Maximum 142 lm/W.

CUT-OUT	BEZEL DIAMETERS
Ø176 mm	Ø192 / 195 / 198 mm
BODY HEIGHT	**DRAWING REFERENCE**
103 mm	CIRCA.001–.008

OUTPUT SELECTION

MODEL REF.	OUTPUT	COLOUR	POWER	LIFE
CIRCA.001 / .002	1,325 / 1,350 lm	3000 / 4000 K	9.5 W	>66,000 h L90
CIRCA.003 / .004	2,075 / 2,125 lm	3000 / 4000 K	15.0 W	
CIRCA.005 / .006	3,250 / 3,350 lm	3000 / 4000 K	24.5 W	
CIRCA.007 / .008	4,525 / 4,650 lm	3000 / 4000 K	37 / 38 W	

CONTROLS

/T+DALI Touchdim or DALI; /BTC Casambi; Standard fixed output.

EMERGENCY

/EM remote standard; /EMD remote DALI; /EMS remote self-test; /EMI integral standard; /EMDI integral DALI; /EMSI integral self-test.