

# INSTALLATION GUIDE:


LED SURFACE CAN  
990.0349.01




## IMPORTANT:

The luminaire must not be covered by any debris or insulating material. Electrical termination must be carried out by a qualified electrician in accordance with the latest edition of IEE wiring regulations BS7671.


**PLEASE RETAIN THIS GUIDE FOR FUTURE REFERENCE AND RECYCLE PACKAGING.**

**A**  **ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION**

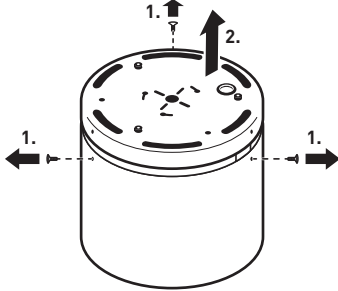


- Unscrew and remove the three screws around the fitting as indicated (1).
- Carefully remove gear tray from body (2).

**B**

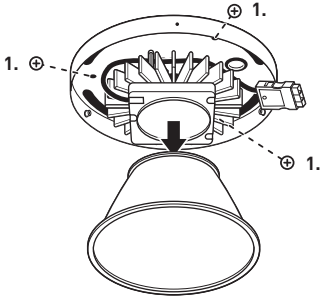


- Remove reflector from luminaire taking care not to damage the reflector's surface (use gloves provided).
- Position the gear tray in desired location and mark mounting points (1).
- Remove gear tray from ceiling and drill mounting holes for suitable fixings (not supplied).

**C**

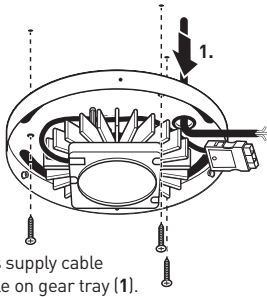

- Feed mains supply cable through hole on gear tray (1).
- Replace gear tray on mounting surface and fix to ceiling securely using suitable fixings (not supplied).


**D**

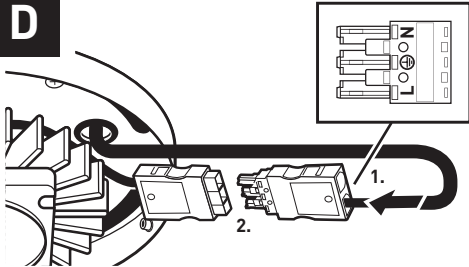


- Connect the mains supply to the female plug (supplied) (1), then connect the female plug to the male plug on the luminaire (2).

**COVER MUST BE FITTED TO PLUG**

**E**

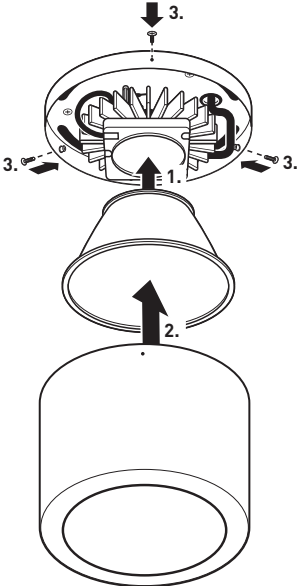

- Carefully relocate the reflector (1) and then replace body over gear tray and hold in place (2).
- Re-fit screws around the fitting as before until secure (3).

 **REINSTATE MAINS SUPPLY**