


132 Series Datasheet

TRIDONIC
TECHNOLOGY
INSIDE

LUMEN LOOP

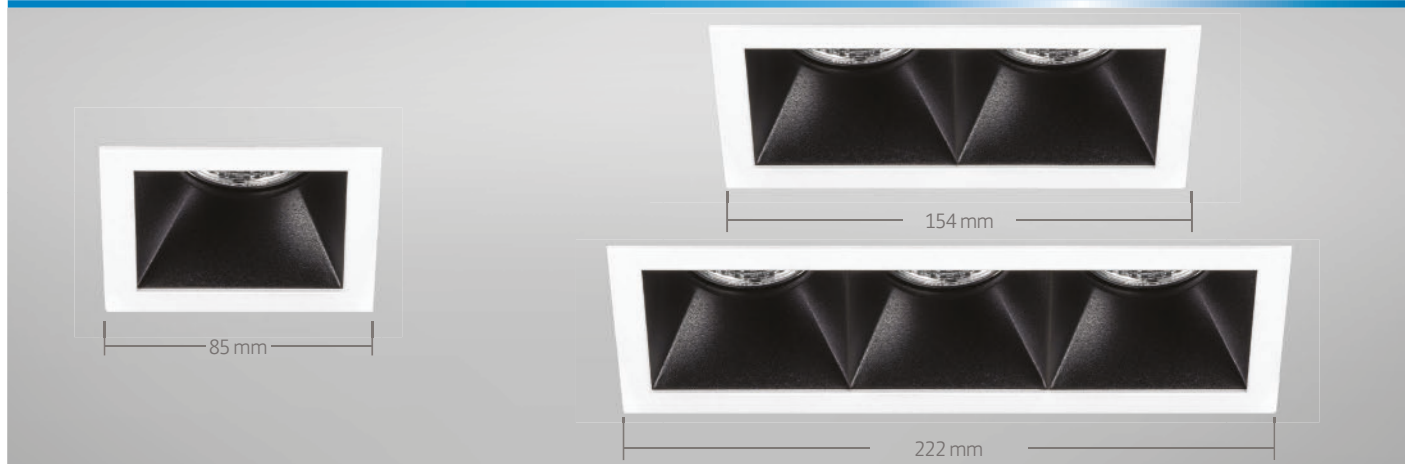


Key Features

- ▶ Low glare architectural downlight
- ▶ Discreet minimal bezel, die-cast from pure aluminium
- ▶ White bezel - RAL 9003
- ▶ Matt black darklight baffle - RAL 9005 - developed to minimise glare
- ▶ Fitted with an integral IP44 protective lens as standard
- ▶ Precision moulded 40° reflector
- ▶ Tridonic LED engine and driver system
- ▶ Excellent thermally optimised 24 super-fin die-cast heatsink
- ▶ Short circuit, overload and temperature protection
- ▶ Life >55,000h L90/F10

Ordering Information

Engine Output (Llm)	Engine Qty	Power (tcW)	Colour	Model Ref.
600	1	8.0	927	132.001
675	1	6.5	830	132.002
700	1	6.5	840	132.003
850	1	10.0	927	132.004
850	1	8.0	830	132.005
900	1	8.0	840	132.006
1200	2	16.0	927	132.201
1350	2	13.0	830	132.202
1400	2	13.0	840	132.203
1700	2	20.0	927	132.204
1700	2	16.0	830	132.205
1800	2	16	840	132.206
1800	3	24.0	927	132.301
2025	3	19.5	830	132.302
2100	3	19.5	840	132.303
2550	3	30.0	927	132.304
2550	3	24.0	830	132.305
2700	3	24.0	840	132.306

Technical Drawing

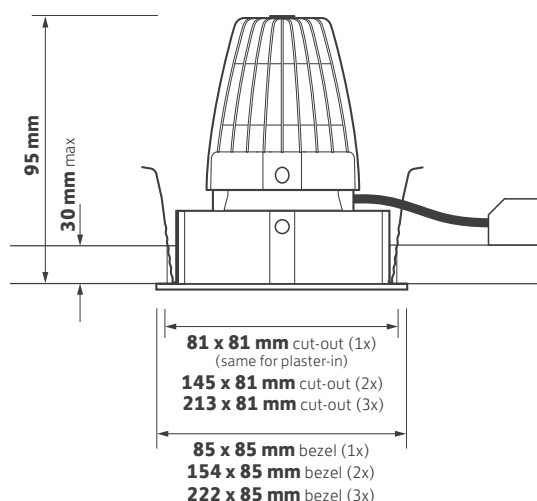

Options


Please select from the options below.

SwitchDIM, DALI or DSI	/ECO
Mains dimming	/MDIM
Narrow beam reflector 20°	/NB
EM conversion	/EM
DALI and self test EM conversion	/EMD
EM conversion with integral indicator	/EMI
DALI/self test EM conversion with integral indicator	/EMDI
Plaster-in bezel version	/PI
Black bezel	/BK
White softlight baffle	/WSB
Ra90 High colour rendering	/9
Casambi wireless network (inc dim)	/BTC


132 Series Options and Accessories

LUMENLOOP

Options




/ECO
SwitchDIM, DALI or DSI



/MDIM
Mains dimming



/NB
20° Narrow beam reflector

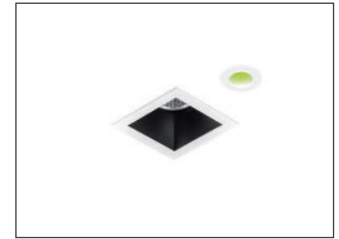

/EM
EM conversion



/EMD
Self test and DALI EM conversion




/EMi
EM conversion with integral indicator



/EMDi
DALI/self test EM conversion with integral indicator



/9
High colour rendering Ra90 LEDs



/BTC
Bluetooth / Casambi wireless control (inc dim)



/PI
Plaster-in bezel version (cut-out 81 x 81 mm) 132.0 only




/BK
Black bezel - RAL 9005 (single version only)



/WSB
White softlight baffle - RAL 9003



Product variations
Other colours and specifications available on request



Wall wash available
Please see 133 Series datasheet



Round available
Please see 130 Series and 131 Series datasheets