
Tubular LED pendant

INSTALLATION GUIDE

990.0444.01 - 18/02/2025

Important



The light source in this product shall only be replaced by the original manufacturer, service agent or a similarly qualified person.



Control gear replaceable by a professional

For light source energy class information, please refer to the relevant product technical data sheet.


Please retain this guide for future reference and recycle packaging.



We reserve the right to amend any product specification without prior notice. Any alterations made to the luminaire may affect life and light output and invalidate any warranty. Luminaire complies with all safety standards set out in BS EN 60598.

1 Isolate mains supply before commencing installation

- Feed mains cable through grommet in ceiling plate.
- Secure ceiling plate to ceiling using suitable screws **A** (not supplied)

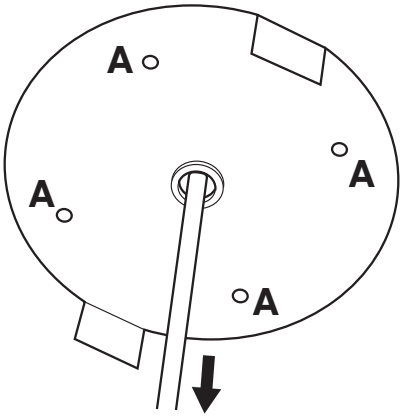


2

- Taking care to observe markings on LED driver housing to ensure correct polarity, connect mains supply to primary / input.
- Fit strain relief and covers.
  IMPORTANT: Strain relief and covers MUST be fitted to driver following connection.



- For variants fitted with DALI control gear, please refer to supplementary installation guide 990.0009.01

3

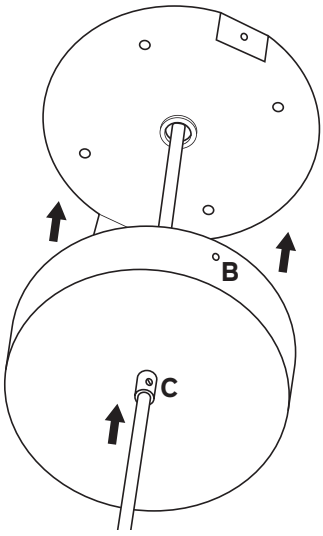

- Place cover over ceiling plate, ensuring that fixing holes line up and no cables are trapped.
- Replace 2 x screws B to secure.

NOTE: Drop length adjustment

- Loosen grub screw **C**.
- Disconnect drop from driver output.
- Adjust drop length.
- Tighten grub screw C to secure
- Trim any excess cable and re-terminate to driver output, taking care to ensure correct polarity.

Reinstate mains supply